



MAXAMP 30 STEREO AMPLIFIER CIR

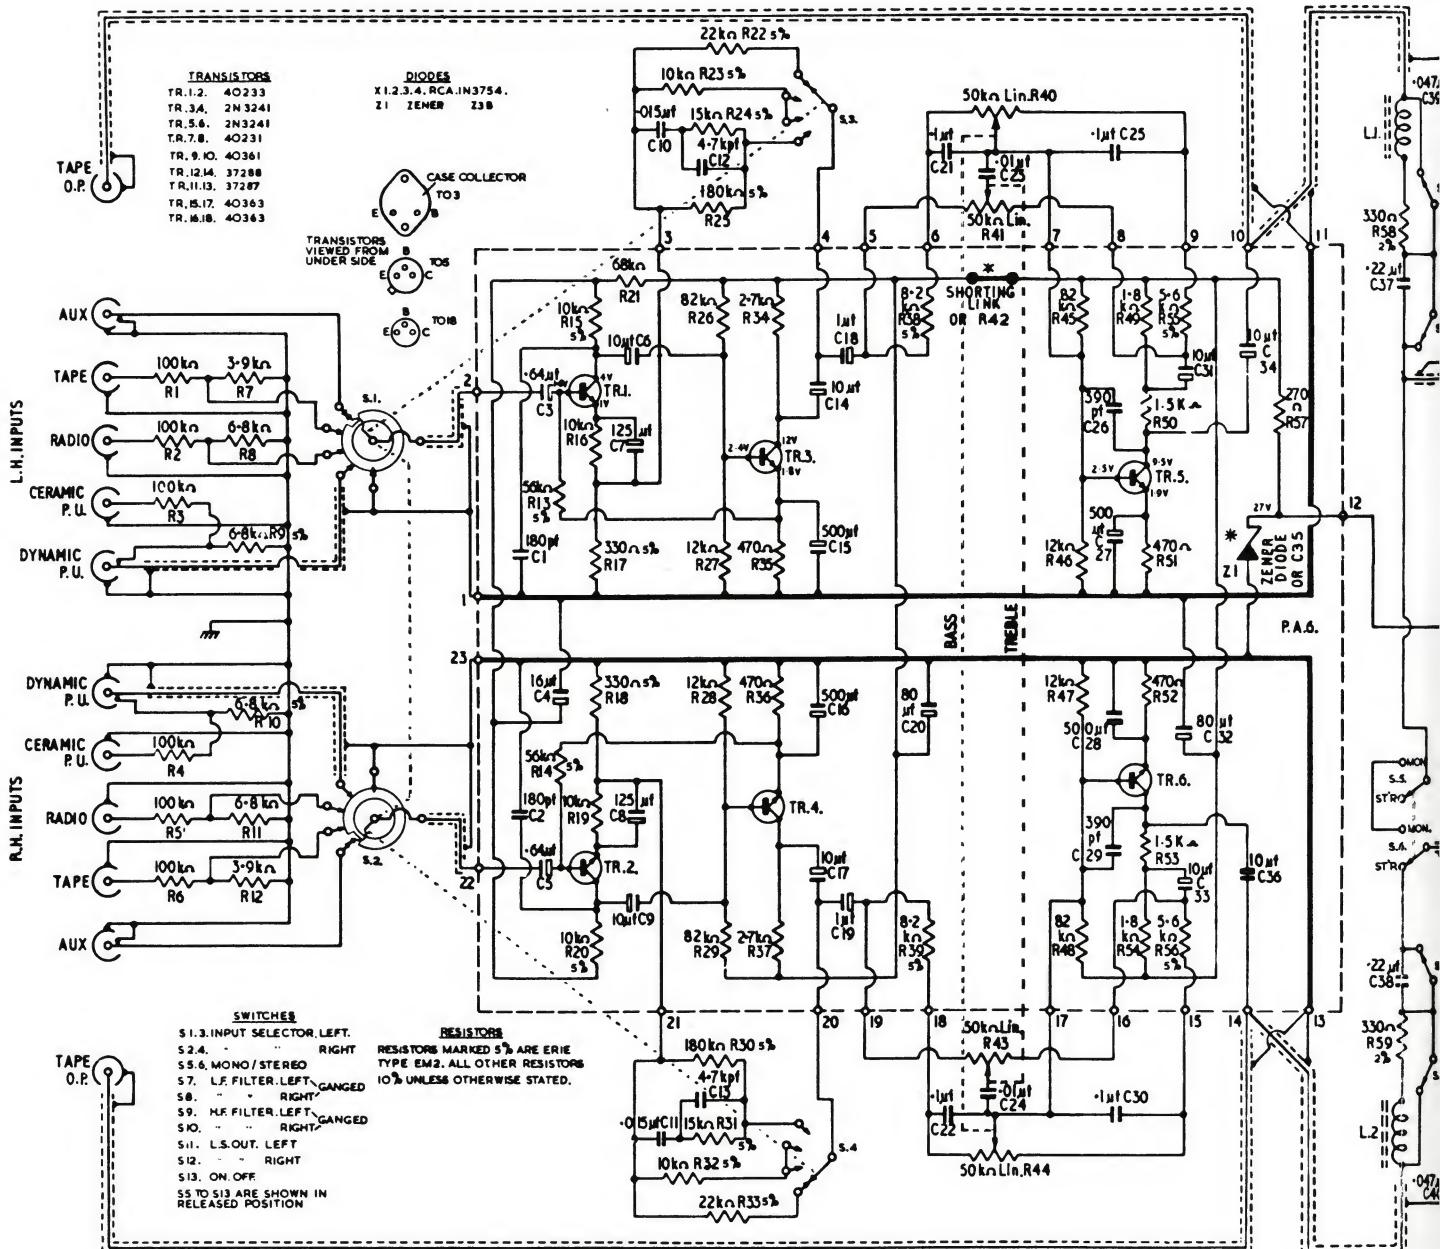

ALL VOLTAGES MEASURED ON AVO MODEL 8 (NOT USING 2.5V RAI)
RESPECT TO CHASSIS AND UNDER NO SIGNAL CONDITIONS.

VOLTAGES SHOWN FOR THE LEFT HAND CHANNEL APPLY EQUAL

CIRCUIT DIAGRAM

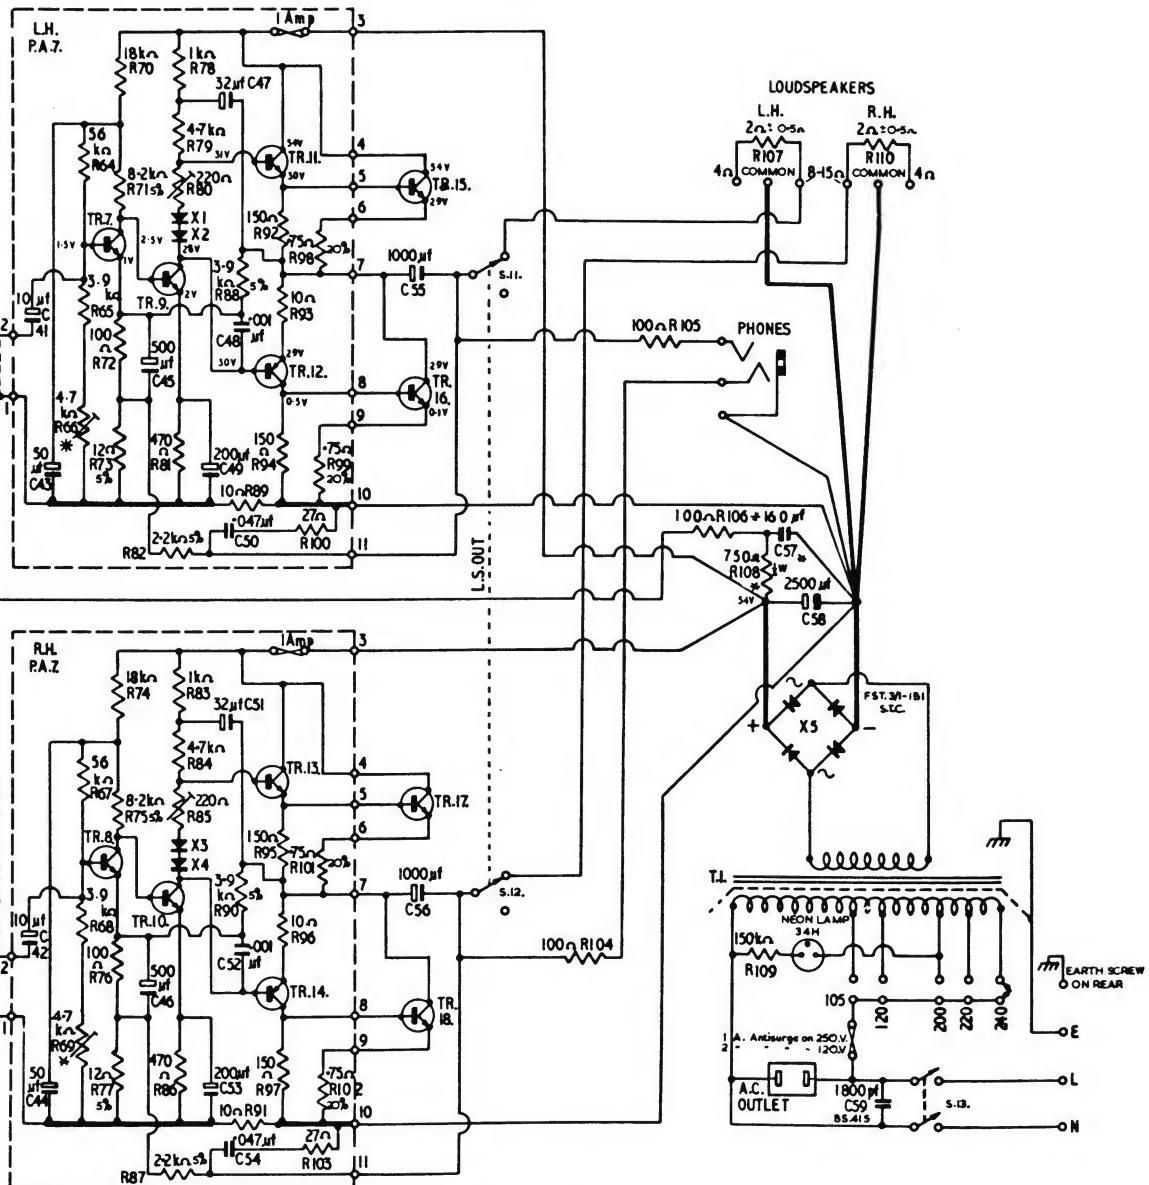

* MODIFICATIONS

COMPONENTS MARKED WITH A * HAVE THE FOLLOWING ALTERNATIVE VALUES OR ALTERATIONS ON SOME EARLY PRODUCTION AMPLIFIERS:-

R42	220 OHM RESISTOR IN PLACE OF SHORTING-LINK
R66	22 K
R69	22 K
R106	560 OHM
R108	1.2 K
C35	32 mfd. CAPACITOR IN PLACE OF ZENER DIODE Z1
C57	64 mfd.

(GE) ARE POSITIVE WITH

LY TO THE RIGHT HAND CHANNEL